


INTRODUCING HALO (LEVEL II AND IIIA)

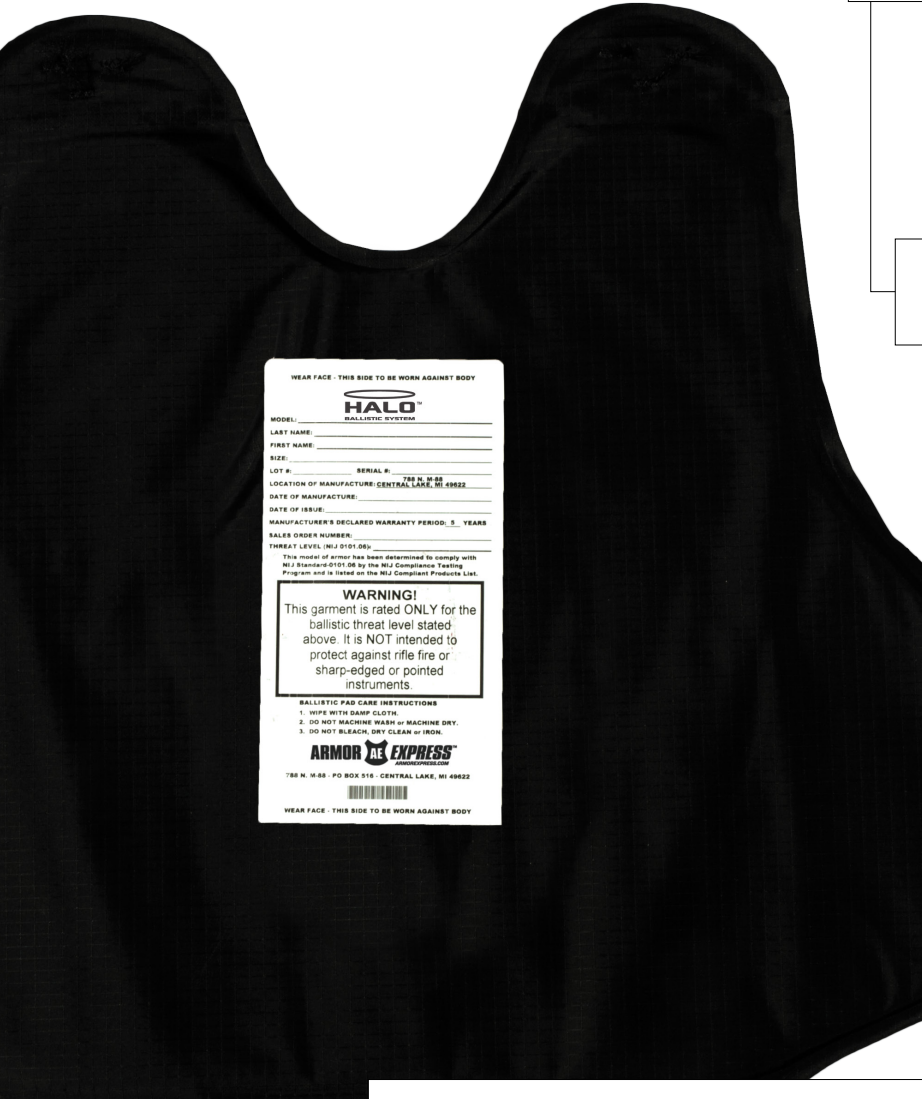

WEAR FACE - THIS SIDE TO BE WORN AGAINST BODY

HALO™
BALLISTIC SYSTEM

MODEL: _____
 LAST NAME: _____
 FIRST NAME: _____
 SIZE: _____
 LOT # _____ SERIAL # _____ 788 N. W. 88
 LOCATION OF MANUFACTURE: CENTRAL LAKE, MI 49822
 DATE OF MANUFACTURE: _____
 DATE OF ISSUE: _____
 MANUFACTURER'S DECLARED WARRANTY PERIOD: 5 YEARS
 SALES ORDER NUMBER: _____
 THREAT LEVEL: NIJ-0101.06

This model of armor has been determined to comply with NIJ Standard-0101.06 by the NIJ Compliance Testing Program and is listed on the NIJ Compliant Products List.

WARNING!
This garment is rated ONLY for the ballistic threat level stated above. It is NOT intended to protect against rifle fire or sharp-edged or pointed instruments.

BALLISTIC PAD CARE INSTRUCTIONS
 1. Wipe with damp cloth.
 2. DO NOT MACHINE WASH or MACHINE DRY.
 3. DO NOT BLEACH, DRY CLEAN or IRON.

ARMOR EXPRESS™
PROTECTION

788 N. W. 88 - PO BOX 516 - CENTRAL LAKE, MI 49822

WEAR FACE - THIS SIDE TO BE WORN AGAINST BODY

INNOVATIVE FEATURES

- Streamlined & efficient design
- Flexible build for all-day comfort
- Additional stopping power

Detailed specifications available upon request

COMMON SPECIAL THREATS

**Armor tested to varying rounds - see preceding pages for exact threats tested*


II

IIIA




5.7 x 28, 40 gr. FNH SS197SR

5.7 x 28, 40 gr. FNH SS197SR



9mm, 124 gr. Luger +P GDHP

5.7 x 28, 27 gr. FNH SS195LF



.357 SIG, 125 gr. Gold Dot HP

9mm, 124 gr. Luger +P GDHP



.44 Rem. Magnum, 240 gr. Hydra-Shok

12 Gauge, 1 oz. Rifled Slug

Certified to NIJ-0101.06 ballistic requirements



Industry Leading Performance - The flagship ballistic offering by Armor Express, the Halo package is a rare combination of strength, flexibility, and comfort.

Ground-breaking Protection - Designed in the lab, proven in the field, the Halo (level II and IIIA) is battle tested. Offering phenomenal protection against many special threat rounds in the field today - the Halo watches over those who put their lives on the line everyday.

HALO

LEVEL II

TECHNICAL SPECIFICATIONS

Model Designation	HLO-D-II
Certified to NIJ-0101.06 Threat Level	II
Test ID #	AEX09-001652
NIJ Certified Sizes	C1 - C5
Gender	Neutral
Ballistic Material	Twaron® Microfilament Flex Woven Aramid & Twaron® LFT
Pad Cover	Seam-sealed, waterproof Ripstop Nylon

Weight (Areal Density)	0.92 lbs/ft ²
Thickness	0.210 in
V-50 - 9mm	1,617 ft/s
V-50 - .357 Mag.	1,606 ft/s
Certification BFS - 9mm	34.4 mm
Certification BFS - .357 Mag.	37.50 mm
Warranty	5 Years

SPECIAL THREATS*

Weapon	Ammunition
S&W.44 REM MAG	240gr. HYDRA-SHOK P44HS1
FN HERSTAL 5.7x28	40gr. Hornady V-Max SS197SR SC
S&W M&P 9mm	SPEER LE 124 gr. GDHP 53617
S&W M&P 9mm	50gr. USM49mm LIBERTY
S&W M&P .40	USM40 S&W LIBERTY

*Special threat testing conducted in the Armor Express' state-of-the-art Ballistic Research Laboratory using the NIJ-0101.06 shot pattern.

HALO

LEVEL IIIA

TECHNICAL SPECIFICATIONS

Model Designation	HLO-B-III A
Certified to NIJ-0101.06 Threat Level	III A
Test ID #	AEX09-001688
NIJ Certified Sizes	C2 - C5
Gender	Neutral
Ballistic Material	Twaron® Microfilament Flex Woven Aramid & Twaron® LFT and Twaron® Laminate
Pad Cover	Seam-sealed, waterproof Ripstop Nylon

Weight (Areal Density)	1.23 lbs/ft ²
Thickness	0.270 in
V-50 - .357 SIG	1,798 ft/s
V-50 - .44 Mag.	1,609 ft/s
Certification BFS - .357 SIG	29.8 mm
Certification BFS - .44 Mag.	38.9 mm
Warranty	5 Years

SPECIAL THREATS*

Weapon	Ammunition
FN HERSTAL 5.7x28	SS197SR 40.gr
S&W M&P 9mm	SPEER LE 124gr. GDHP 53617
BROWNING 12ga.	2 3/4" 1oz FED. LEB127 LRS
FN HERSTAL 5.7X28	27gr. SS195LF

*Special threat testing conducted in the Armor Express' state-of-the-art Ballistic Research Laboratory using the NIJ-0101.06 shot pattern.

HALO *FEMALE*

LEVEL II

TECHNICAL SPECIFICATIONS

Model Designation	HLOF-D-II
Certified to NIJ-0101.06 Threat Level	II
Test ID #	AEX09-001738
NIJ Certified Sizes	C1 - C5
Gender	Female
Ballistic Material	Twaron® Microfilament Flex Woven Aramid & Twaron® LFT
Pad Cover	Seam-sealed, waterproof Ripstop Nylon

Weight (Areal Density)	0.97 lbs/ft ²
Thickness	0.240 in
V-50 - 9mm	1,678 ft/s
V-50 - .357 Mag.	1,605 ft/s
Certification BFS - 9mm	30.90 mm
Certification BFS - .357 Mag.	34.50 mm
Warranty	5 Years

SPECIAL THREATS*

Weapon	Ammunition
S&W .44 REM. MAG.	240gr. HYDRA-SHOK P44HSI
.45 WIN MAG GRIZZLY MARK 1	.45 WIN MAG 230gr. RN/TCJ
S&W M&P .357 SIG	SPEER LE 125gr. GDHP 54234
S&W M&P 9MM	SPEER LE 124gr. GDHP 53617
FN HERSTAL 5.7x28	40gr. SS197SR V-MAX

*Special threat testing conducted in the Armor Express' state-of-the-art Ballistic Research Laboratory using the NIJ-0101.06 shot pattern.

HALO *FEMALE*

LEVEL IIIA

TECHNICAL SPECIFICATIONS

Model Designation	HLOF-C-III A
Certified to NIJ-0101.06 Threat Level	III A
Test ID #	AEX09-001760
NIJ Certified Sizes	C1 - C5
Gender	Female
Ballistic Material	Twaron® Microfilament Flex Woven Aramid, Twaron® LFT & Twaron® Laminate
Pad Cover	Seam-sealed, waterproof Ripstop Nylon

Weight (Areal Density)	1.28 lbs/ft ²
Thickness	0.280 in
V-50 - .357 SIG	1,798 ft/s
V-50 - .44 Mag.	1,664 ft/s
Certification BFS - .357 SIG	28.1 mm
Certification BFS - .44 Mag.	35.2 mm
Warranty	5 Years

SPECIAL THREATS*

Weapon	Ammunition
S&W M&P 9MM	SPEER LE 124gr. GDHP 53617
BROWNING 12ga.	LEB127LRS 1oz. Rifled slug FED 2 3/4" TAC.
FN HERSTAL 5.7x28	27gr. SS195LF
FN HERSTAL 5.7x28	40gr. SS197SR V-MAX

*Special threat testing conducted in the Armor Express' state-of-the-art Ballistic Research Laboratory using the NIJ-0101.06 shot pattern.